

Cable Cubby® 300S

Furniture-Mountable Enclosure with Square Bezel for Cables, AAPs, and AC Power Outlets

Key Features

- Accommodates up to five single-space AAP - Architectural Adapter Plates, depending on version
- Offers convenient access to cable connections
- Top surface available in black anodized or brushed aluminum finishes
- Optional AC power outlets available for US, Europe, and other major world markets
- Available Universal AC outlet is compatible with a variety of AC plug types including UK, 2-Pin Europlug, Italy, Denmark, and India*
- UL/c-UL listed and CE compliant



Model	Version Description	Part #
Cable Cubby 300S	Two US AC - Black	60-526-01
Cable Cubby 300S	Two US AC - Brushed Aluminum	60-526-03
Cable Cubby 300S	No AC - Black	60-712-00
Cable Cubby 300S	No AC - Brushed Aluminum	60-712-10
Cable Cubby 300S	One UNIV AC - Black	60-712-0J
Cable Cubby 300S	One UNIV AC - Brushed Aluminum	60-712-1J
Cable Cubby 300S	One EU AC - Black	60-712-0D
Cable Cubby 300S	One EU AC - Brushed Aluminum	60-712-1D
Cable Cubby 300S	One AUS AC - Black	60-712-0F
Cable Cubby 300S	One AUS AC - Brushed Aluminum	60-712-1F
Cable Cubby 300S	One UK AC - Black	60-712-0B
Cable Cubby 300S	One UK AC - Brushed Aluminum	60-712-1B
Cable Cubby 300S	One France AC - Black	60-712-0E
Cable Cubby 300S	One France AC - Brushed Aluminum	60-712-1E
Cable Cubby 300S	One India AC - Black	60-712-0G
Cable Cubby 300S	One India AC - Brushed Aluminum	60-712-1G
Cable Cubby 300S	One Israel AC - Black	60-712-0C
Cable Cubby 300S	One Israel AC - Brushed Aluminum	60-712-1C
Cable Cubby 300S	One Swiss AC - Black	60-712-0H
Cable Cubby 300S	One Swiss AC - Brushed Aluminum	60-712-1H

DESCRIPTION

The Extron **Cable Cubby® 300S** is a durable, metal enclosure that can be mounted into a tabletop or other flat surface. When the cables are not being used, they can be stored out of sight while remaining connected to the system, offering a discreet way to access cables and connection points as they are needed.

Cable Cubby 300 models are available without AC power, and with a variety of AC power outlet styles. Power modules are height-adjustable and are available with discrete AC outlets for the US, Central Europe, and other major world markets. A Universal AC outlet, which accepts a variety of plug types including UK, 2-Pin Europlug, Italy, Denmark, and India, is also available. The no-power version accommodates up to five single space AAP - Architectural Adapter Plates. US models are equipped with two unswitched AC power outlets and can accommodate up to three single-space AAP - Architectural Adapter Plates. All other models feature one unswitched AC power outlet and accommodate up to two single-space AAPs. The Extron line of optional AAPs allows you to customize the Cable Cubby with almost any kind of pass-through connectivity required.

Within its base, the Cable Cubby 300S offers adjustable panels with three sizes of hole openings to supplement a variety of cable diameters. AAPs and AC Power Modules are height-adjustable to suit cable lengths and connector types. The optional [Retractor Cable Retraction System](#) is available in versions to support most AV and data signal types. The Retractor provides improved management of cables within the Cable Cubby. The Cable Cubby 300S ships standard in black anodized or brushed aluminum finishes.

Features

- **Accommodates up to five single-space AAP - Architectural Adapter Plates, depending on version**
- **Offers convenient access to cable connections**
- **Top surface available in black anodized or brushed aluminum finishes**
- **Flush-mountable into table or flat surface**
- **Available with no power outlet and one or two unswitched AC outlets**
- **Optional AC power outlets available for US, Europe, and other major world markets**
- **Available Universal AC outlet is compatible with a variety of AC plug types including UK, 2-Pin Europlug, Italy, Denmark, and India***
- **UL/c-UL listed and CE compliant**
- **Installation routing template available**
- **Finish Sample Kit available, part #70-804-01** — Includes black anodized and brushed aluminum sample swatches that match Extron architectural product finishes.
- **Optional Retractor cable retraction system supports most AV and data signal types**

*Note: *For complete compatibility information on all AC plug types, see the Universal AC Outlet Compatibility Guide, available online at www.extron.com/UACguide.*

Cables and AAP - Architectural Adapter Plates are shown in the photos and diagrams above as examples only. Cables and AAPs are optional accessories for the Cable Cubby products and must be ordered separately.

INCLUDED ACCESSORIES

- | | | |
|---|---|-------|
| • Cable Cubby Hole Plug and Grommet Kit (qty 2) | Assorted plugs and grommets in black | 70-38 |
| • Cable Pass-Through AAP | Single Space AAP - Black: Right Version, Grommets Included | 70-26 |
| • Cable Pass-Through AAP | Single Space AAP - Black: Right/Middle Version, Grommets Included | 70-26 |
| • Cable Pass-Through AAP | Single Space AAP - Black: Left Version, Grommets Included | 70-27 |

OPTIONAL ACCESSORIES

- | | |
|----------------------------------|--|
| • RGB 580xi | Architectural Remote Interface with Audio Interfacing ar ADSP™ |
| • RGB 580xi CCS AAP | Mountable Remote Interface Control Panel with Horizontal Shift Control for Cable Cubby® Enclosures |
| • RGB 580xi CCSI AAP | Mountable Remote Interface Control Panel with Input Select Button for Cable Cubby® Enclosures |
| • MVGA-A M-F | Male to Female VGA Micro HR with Audio Cables |
| • Installation Routing Templates | For HSA - Hideaway® Surface Access and Cable Cubby® Enclosures |
| • Retractor | Cable Retraction System for Cable Cubby® Enclosures |

SPECIFICATIONS

Cable Cubby® Series

General

NOTE The Universal AC outlet is fully compatible with Europlug, British, Indian, Danish, and Italian plug types. See the Universal AC outlet guide on the Extron Web site, www.extron.com, for compatibility details on all plug types.

NOTE Architectural Adapter Plates (AAPs) are shown in diagrams and in photographs as examples only. AAPs are optional accessories for the Cable Cubby products. AAPs and cables must be ordered separately.


Mounting

Furniture mount	Yes
Min./max. table thickness	0.375" to 3.00" (0.95 cm to 7.62 cm)
Enclosure type	Metal
Enclosure dimensions	

CAUTION Use the appropriate metal Extron routing template or refer to the surface cutout dimensions here before cutting a hole in the furniture or other surface. Pay special attention to the direction the unit will face; the unit's AAP and connector access side is underlined. Extron is not responsible for miscut mounting holes.

Cable Cubby 300S


Top plate (outer rim)	<u>5.13"</u> W x 6.47" D (13.0 cm W x 16.4 cm D)
Surface cutout (inside rim)	<u>4.65 +0.00/-0.02"</u> W x 6.00 +0.00/-0.02" D (<u>11.81 +0.00/-0.05</u> cm W x 15.24 +0.00/-0.05 cm D)
Box (under surface)	6.41" H x <u>4.32"</u> W x 4.75" D without clamps (16.28 cm H x <u>10.97</u> cm W x 12.07 cm D without clamps) <u>8.07"</u> W (<u>20.49</u> cm W) with clamps



Cable Cubby 300S

Cable Cubby 300C


Top plate (outer rim)	6.50" (16.51 cm) diameter circle
Surface cutout (inside rim)	6.03 +0.00/-0.02" (15.32 +0.00/-0.05 cm) diameter circle
Box (under surface)	6.41" H x <u>4.32"</u> W x 4.75" D without clamps (16.28 cm H x <u>10.97</u> cm W x 12.07 cm D without clamps) <u>8.07"</u> W (<u>20.49</u> cm W) with clamps



Cable Cubby 300C

Cable Cubby 600


Top plate (outer rim)	<u>6.96"</u> W x 6.96" D (<u>17.68</u> cm W x 17.68 cm D)
Surface cutout (inside rim)	<u>6.49 +0.00/-0.02"</u> W x 6.49 +0.00/-0.02" D (<u>16.48 +0.00/-0.05</u> cm W x 16.48 +0.00/-0.05 cm D)
Box (under surface)	6.41" H x <u>6.40"</u> W x 4.75" D without clamps (16.28 cm H x <u>16.26</u> cm W x 12.07 cm D without clamps) <u>10.15"</u> W (<u>25.79</u> cm W) with clamps

**Cable Cubby 600****Cable Cubby 800**

Top plate (outer rim)

Surface cutout (inside rim)

Box (under surface)

8.36" W x 6.82" D (21.23 cm W x 17.32 cm D)7.89 +0.00/-0.02" W x 6.35 +0.00/-0.02" D(20.04 +0.00/-0.05 cm W x 16.13 +0.00/-0.05 cm D)6.41" H x 7.80" W x 4.75" D without clamps(16.28 cm H x 19.81 cm W x 12.07 cm D without clamps)11.57" W (29.39 cm W) with clamps**Cable Cubby 800****Cable AAP cable hole diameters**

Large cable hole

0.63" (1.60 cm)

Large grommet

0.45" (1.14 cm)

Medium cable hole

0.56" (1.42 cm)

Medium grommet

0.39" (0.99 cm)

Small cable hole

0.50" (1.27 cm)

Small grommet

0.31" (0.79 cm)

Product weight

Cable Cubby 300S/300C

5.0 lbs (2.3 kg)

Cable Cubby 600

9.0 lbs (4.1 kg)

Cable Cubby 800

13.0 lbs (5.9 kg)

Shipping weight

Cable Cubby 300S

8 lbs (4 kg)

Cable Cubby 300C

8 lbs (4 kg)

Cable Cubby 600

12 lbs (6 kg)

Cable Cubby 800

15 lbs (7 kg)

Vibration

ISTA 1A in carton (International Safe Transit Association)

Regulatory compliance

Safety

CE, CSA C/US, c-UL, UL


Warranty

3 years parts and labor


NOTE Specifications are subject to change without notice.

(8.0-102810-D13)

DIAGRAM

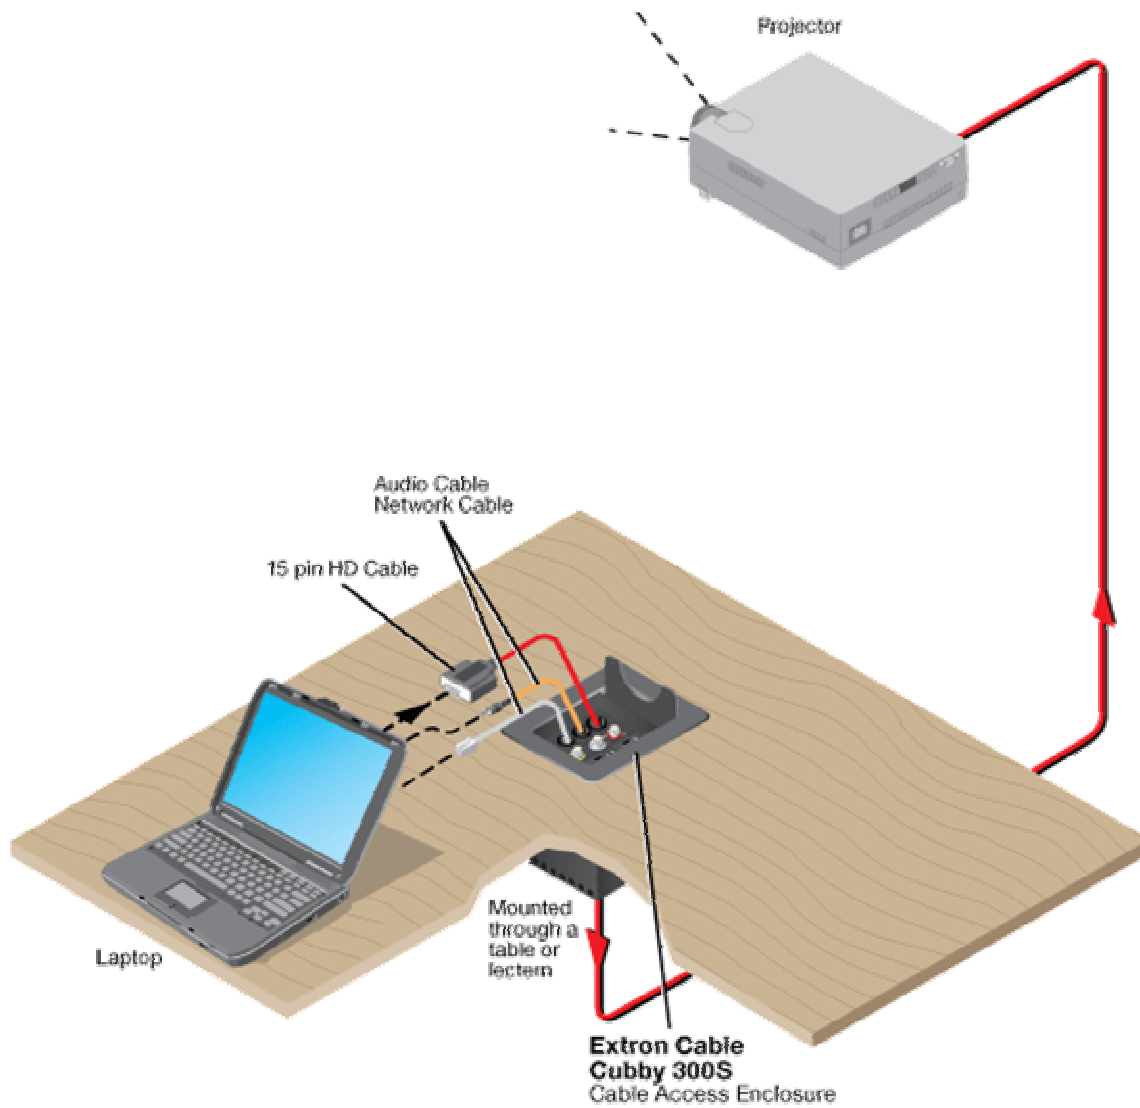

PANEL DRAWING

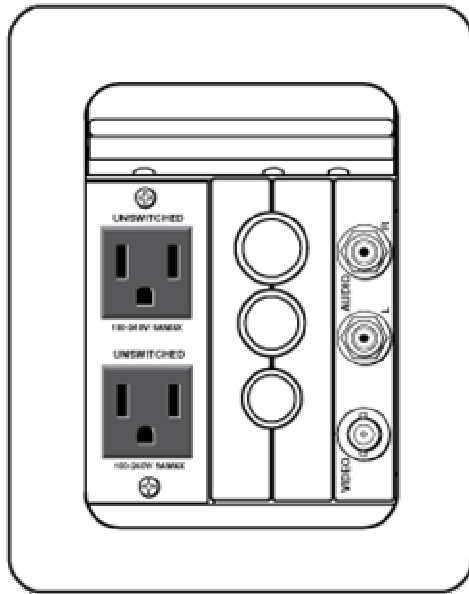

© 2011 Extron Electronics. Specifications are subject to change without notice.